


CHANGES:

V1.1:

- R1, R9, R14, R19 changed to 4M7 (better default value)
- R29 was placed under I2C plug
- renamed and remapped channels (to same as in FW)

V1.2:

- Ups, VDDcore was connected to 3v3 ;-)

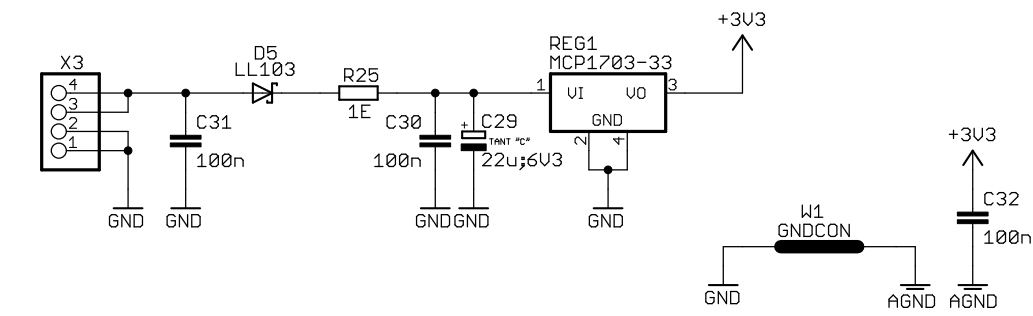

RayDialer _{RX1}	
TITLE: RayDialer-RX1_U12	
Document Number:	REV: V1.2
Date: 29.12.2010 13:55:19	Sheet: 1/1